



Gutterworks Hinge Installation

- Create notches shown below with tin snips or miter saw on the downspout extension.
- Remove 3" from the top wall to create a 45–47-degree cut-out.
- Special Note: Side walls of the downspout extension need to be flared out to keep from catching elbow when lowered.

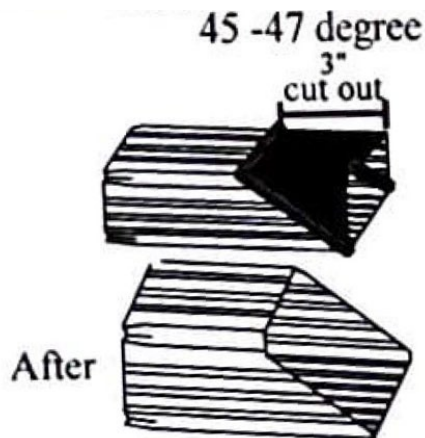

Hinge & Velcro Tab

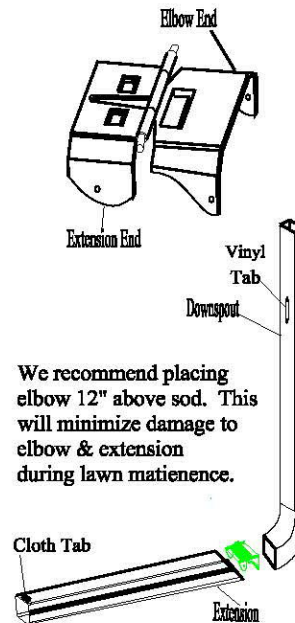

We recommend placing elbow 12" above sod. This will minimize damage to elbow & extension during lawn maintenance.

LOCKING TABS INSTALLED


Install cloth tab to extension first then raise Ext. & attach vinyl tab to downspout in + form.

Universal Side Latch



- Latch should be installed on the side of the existing downspout slightly above the end of the extension when raised up.
- The cut out on the latch will hook onto the extension to hold it up when needed.
- When not in use you can rotate the latch to point down so it's hidden and out of the way.

Latch

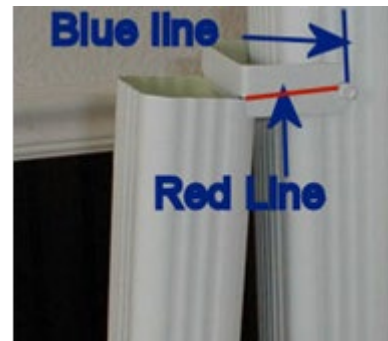

- Screw should be installed at a horizontal even or just above the height of the extension end when raised up.
- See Red line, and vertical position in center of downspout, Blue line.



**Hinge Instruction
Video**